

**Required Tools: (Not included)**


- A. Phillips screwdriver
- B. Flathead screwdriver
- C. Cutting pliers
- D. Long nose needle pliers

**⚠ WARNING**

**⚠ CAUTION:** To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.

**Step 1**

Using a Phillips screwdriver, remove the four (4) screws that hold the seat fairing onto the frame.

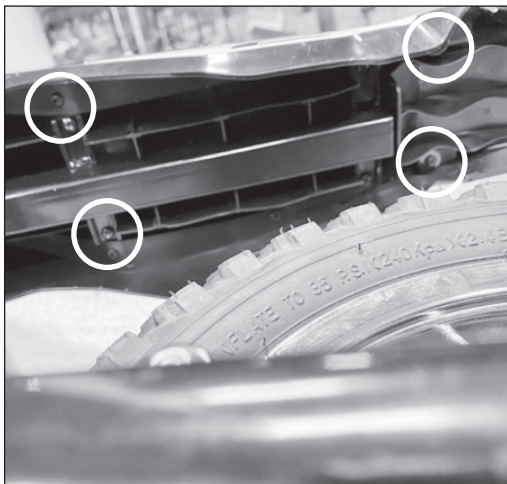
**Step 2**

Lift the seat cover being careful not to pull the wires from the power switch and set seat cover aside .



### Step 3

Cut the zip tie that hold the wires onto the frame. Locate and disconnect the charger port from the controller.

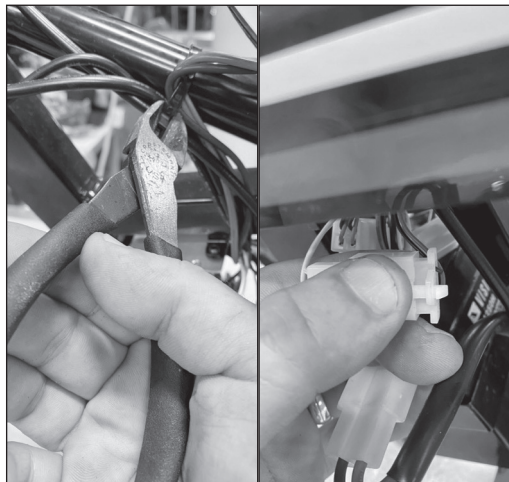


### Step 4

Disconnect the black wire from the charger port that connects to the power switch.




### Step 5

Using a flathead screwdriver, remove the plastic glue from the back of the charger port and using long nose needle pliers, remove the ring at the back of the charger port and push it out from the seat fairing.

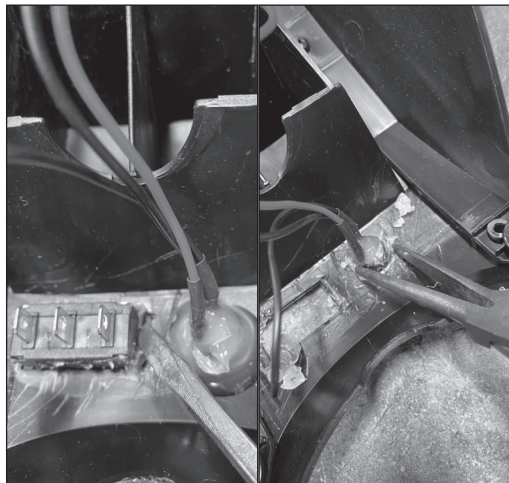

### Step 6

Using a small pointy object depress the tabs from the prongs and remove prongs from white connector.

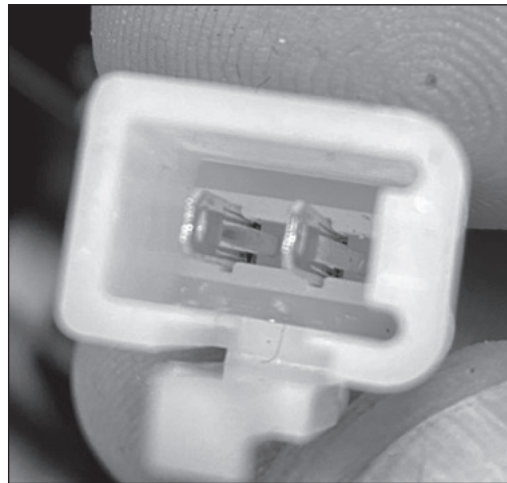

### Step 7

Reverse the steps to install the new charger port.

**ATTENTION: Charge battery 12 hours before using.**