


# KIT-801 Wiring Instructions

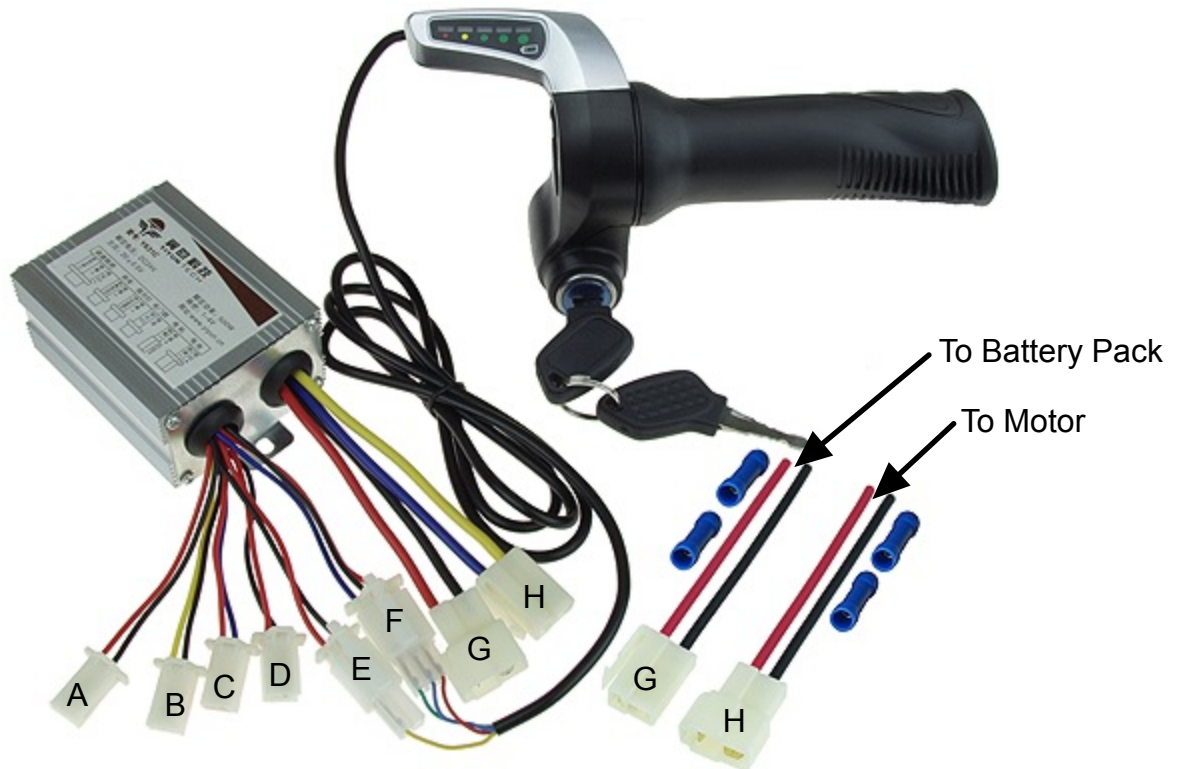

A = Not Used  
B = Not Used  
C = Not Used  
D = Not Used  
E = To Throttle  
F = To Throttle  
G = To Battery Pack  
H = To Motor

- 1-Remove fuse or disconnect wiring harness from batteries before installing this kit.
- 2- Cut the battery pack wires close to the old speed controller and crimp on the kit's wires that go to the battery pack connecting red to red and black to black.
- 3- Cut the motor wires close to the old speed controller and crimp on the kit's wires that go to the motor connecting red to red and black to black.
- 4- Install the fuse or reconnect the wiring harness to the batteries.
- 5- Turn the throttle's key switch to the on position and slowly twist the throttle to confirm proper installation of the kit.